


Please read the installation in detail before install lamp.

- Please turn off engine when install position lamp.
- Please wear insulated glove to avoid electric shock.
- Please confirm the terminals connection firmly.
- Please don't mislay "+", "-" and "-" when wiring.

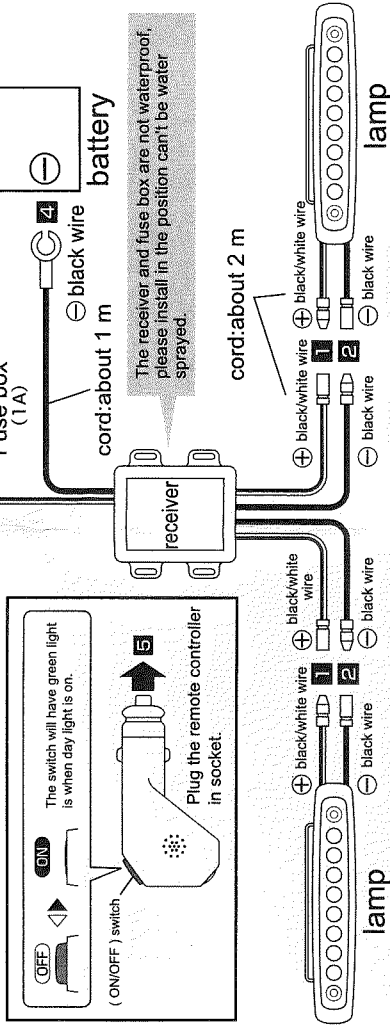

Installation

1. Please make a mark after lamp body installation position is decided.
2. Take apart the bracket from lamp body and stick bracket on the mark position by double tape. Then, screw the bracket again, then, screw lamp body on bracket.
3. For your safety, please take apart the "-" terminal from battery.
 - ★ Please note that the memory of the car electric equipment (such as clock and stereo) will be clean when take apart of "-" terminal from battery.
4. Receiver should be connected with lamp body. (1 2)
5. "+" of Receiver is connected with "+" terminal of battery. (3)
6. "-" of Receiver is connected with "-" terminal of battery. (4)
7. Plug the remote controller in socket. (5)
8. Please make sure the on/off switch is in "on" position in advance.
9. Start up engine and check if the position lamp is on.
10. Press on/off switch of remote controller to check if position lamp can be "on" or "off" normally.

How to use

1. Plug the remote controller in socket.
 - ★ Please make sure the on/off switch is in "on" position in advance.
2. Start up engine, then, position lamp will be "on" automatically.
3. Turn off engine, then, position lamp will be "off" automatically.
 - ★ Please use the on/off switch on remote controller to off light at night.

Caution: For some car models, the socket still has power even though car key is taken out. It is impossible to use remote controller and engine to control light "On" or "Off" automatically. So, please use the on/off switch on remote controller to control. Furthermore, it will consume power continuously if forget to turn off light.

Caution

- Please turn off engine when install position lamp.
- Please wear insulated glove to avoid electric shock.
- Please confirm the terminals connection firmly.
- Please don't mislay "+" and "-" when wiring.
- Please use cleaning naphtha to clean surface before installing, it could increase the adhesion.
- In order to increase adhesion and fix position lamp well, please don't wash car within 24 hour after install.
- The receiver and fuse box are not waterproof, please install in the position can't be water sprayed.
- We could not take any responsibility if customers disassemble or modify this product to cause any problem.
- For DC-12V car only. The voltage of some car models will higher than 19V when speed up. It also will damage this product.
- Due to this product is used electric wave, so if there is other product is used electric wave in car, maybe sometime will be not so stable.
- The LED color shade of each product will have a little different, please kindly understand.
- For sockets dia 20.8 ~ 22 mm.
- If socket still have power after car key is taken out, it will consume power continuously if forget to turn off light, please note.